



www.folangsiforklift.com

ELECTRIC STACKER

前移式电动堆垛车

KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ

CQD12/15-L/LF

AC 1200/1500Kg (起升高度: 1400-4500mm)

CONFIGURATION AND PERFORMANCE

- ▶ Fork tilt, double oil cylinder more smoothly.
- ▶ Electro-hydraulic integrated control, multi-function handle.
- ▶ Electronic power steering system, light and low noise.
- ▶ Two-way magnetic valve, three drop speed mode.
- ▶ AC Driving system, No carbon brush, maintenance free.
- ▶ USA CURTIS driving controller.
- ▶ Electromagnetic, regenerative braking system.
- ▶ Automatic lifting limit, proximity switch, long life.

SAFETY

- ▶ Curve automatic deceleration devices, more safe.
- ▶ Goods high position, vehicle automatic deceleration.
- ▶ Stepless speed control system, safe and quiet.
- ▶ Controller with Multiple automatic protection.
- ▶ Emergency reversing device/Emergency brake switch.

配置和性能

- ▶ 货叉倾斜, 双油缸更平稳;
- ▶ 电液集成控制, 多功能手柄;
- ▶ 电子助力转向, 轻便、静音;
- ▶ 双路电磁阀, 三中下降速度模式;
- ▶ 交流驱动, 无碳刷、免维护;
- ▶ 美国 CURTIS 驱动控制器;
- ▶ 电磁、再生制动系统;
- ▶ 起升自动限位, 长寿命接近开关。

安全

- ▶ 弯道自动减速装置, 更安全;
- ▶ 货叉高货位, 车辆行驶自动减速;
- ▶ 驱动无级调速, 安全、静音;
- ▶ 控制器多重自动保护系统;
- ▶ 紧急反向装置 / 紧急制动开关。



Electric Pallet Truck Expert



www.folangsiforklift.com

ELECTRIC STACKER

前移式电动堆垛车

KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ


SPECIFICATION

详细说明


| | Unit | CQD12/15-L | CQD12/15-LF | |
|-------------------------------|--|------------------------------|------------------------------------|---------------------|
| Feature 特性 | Model 型号 | CQD12/15-L CQD12/15-LF | | |
| | Configuration No. 配置号 | 810 | | |
| | Type 类型 | Reach | | |
| | Mast type 门架类型 | 2-Stage 3-Stage Free | | |
| | Load capacity 额定载重 | kg | 1200/1500 | |
| | Load center 载荷中心距 | mm | 500 | |
| | Wheel base 轴距 | mm | 1332 | |
| Wheels | Operating type 操作类型 | Walkie/Stand On | | |
| | Wheels type 车轮类型(前/后) | PU | | |
| Demension | Wheel quantity Driving wheel/Balance wheel/Bearing wheel | 1/0/2 | | |
| | Mast reach distance 门架前移距离 | mm | 425 | |
| | Standard lift height 标准门架起升高度 | mm | 1400/2000/2500/3000/3300/3600/4000 | 3700/3900/4200/4500 |
| | Max extend height 门架作业时整车最大高度 | mm | 2235/2835/3335/4135/4435/4835 | 4582/4780/5080/5380 |
| | Mast lowered height 门架缩回时整车静态高度 | mm | 1490/1790/2040/2290/2440/2590/2790 | 1832/1898/1998/2098 |
| | Lowered fork height 货叉最低高度 | mm | 55 | |
| | Fork size(Length/width/thickness) 标准货叉规格(长/宽/高) | mm | 1070/100/40 | |
| | Overall length 整车全长 踏板收起/放下 | mm | 2440/2890 | |
| | Overall width 车体宽度 | mm | 1083 | |
| | Outside width between forks 货叉外侧间距 | mm | 200-755 | |
| | Fork tilting angle 货叉倾斜角度(前/后) | Grad | 3/5 | |
| | Min.Turning radius 最小转弯半径 踏板收起/放下 | mm | 1596/2040 | |
| | Min.Aisle width for pallets 800 x 1200 最小直角堆垛通道宽度 | mm | 3023/3456 | |
| | Min.Aisle width for pallets 1000 x 1200 最小直角堆垛通道宽度 | mm | 3044/3472 | |
| Performance 性能 | Min.ground clearance 最小离地间隙 | mm | 60 | |
| | Travel speed,laden/unladen 最大行驶速度 满载/空载 | km/h | 5/5.5 | |
| | Lift speed,laden/unladen 最大起升速度 满载/空载 | mm/s | 130/230 | |
| | Travel speed,laden/unladen 最大下降速度 满载/空载 | mm/s | 130/230 | |
| | Gradeability,laden/unladen 爬坡速度 满载/空载 | % | 3/5 | |
| Electrical configuration 电气配置 | Drive motor 驱动电机 | kw | AC1.5 | |
| | Lift motor 起升电机 | kw | DC3.0 | |
| | Steering motor 转向电机 | kw | DC0.15 | |
| | Battery voltage 蓄电池电压 | V/Ah | 24/280 | |
| Weight 重量 | Brake 制动 | Electromagnetic/Regenerative | | |
| | Controller 控制器型号 | CURTIS | | |
| | Battery weight 蓄电池重量 | kg | 235 | |
| | Service weight with battery 自重(包含蓄电池) | kg | 2100 | 2200 |

DIMENSION DRAWING

外形尺寸图

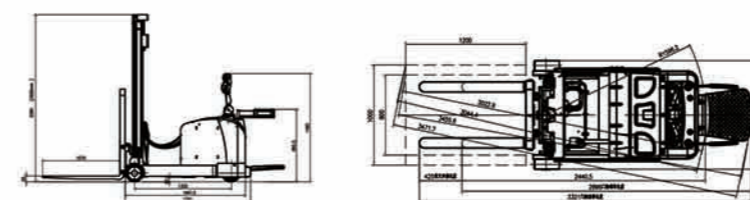

LOAD CURVE

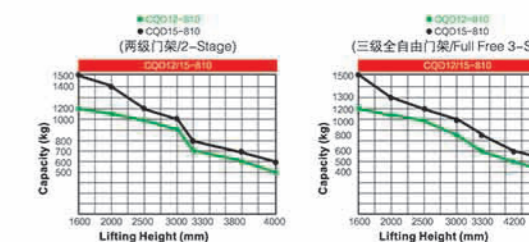

FOLANGSI MACHINE CO., LTD.

Tel.:020-39993595 Fax:020-39993597

E-mail:admin@folangsiforklift.com

