




www.folangsiforklift.com

ELECTRIC STACKER

电动托盘堆垛车

KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ

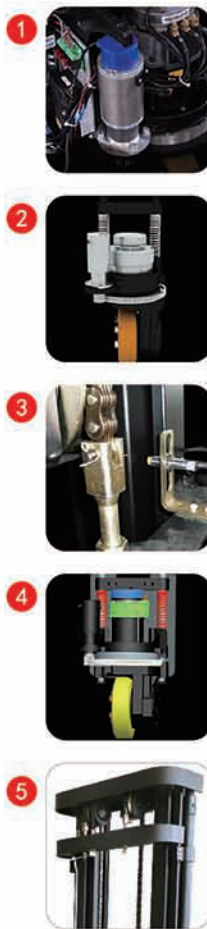

CDD16/20-L Narrow legs

AC1600kg-2000kg

- ▶ 1.AC vertical driving motor reduces the failure rate and saves maintenance cost.
 - ▶ 2.Electronic power steering system(EPS) for flexible and light turning improves the stability of electrical system.
 - ▶ 3.Electronic reverse system guarantees operation safety,save the electric energy and protect hydraulic unit.
 - ▶ 4.Pressurized vibration damping reduces the wheel skidding problems and increases operating comfort.
 - ▶ 5.H steel mast used the cold drawing technology enhances machine structure and improves stability and security.
- ▶ 1. AC 电机,立式驱动,减少故障发生率,节约维护成本;
 - ▶ 2. 电子助力转向 (EPS),转弯灵活、轻便,提高电气系统稳定性;
 - ▶ 3. 电子退位系统,保障作业安全,节约电能,保护液压装置;
 - ▶ 4. 增压减震,减少驱动轮打滑现象,增加操作舒适度;
 - ▶ 5. H 钢门架“冷拉”工艺,强化车体结构,提高安全性和稳定性。

CDD16/20-L 两级基本型门架 (2-STAGE MAST)

Mast model 门架型号	Max.lift height 最大起升高度(mm)	Load capacity 额定承载力(kg)	Mast lowered height 门架缩回时整车静态高度(mm)	Max.extend height 门架作业时整车最大高度(mm)
M250	2500	1600	1765	3000
M300	3000	1600	1980	3500
M360	3600	1200	2335	4100
M400	4000	1000	2500	4500



www.folangsiforklift.com

ELECTRIC STACKER

电动托盘堆垛车

KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ


SPECIFICATION

详细说明

		Unit	CDD16-L	CDD20-L
Feature 特性	Model 型号		CDD16-L	CDD20-L
	Configuration No. 配置号		D930	D930
	Type 类型		Narrow legs	Narrow legs
	Mast type 门架类型		2-Stage STD	2-Stage STD
	Load capacity 额定载重	kg	1600	2000
	Load center 载荷中心距	mm	600	600
Wheels	Wheel base 轴距	mm	1325	1325
	Operating type 操作类型		Walkie/Stand On	Walkie/Stand On
Dimension 尺寸	Wheels type 车轮类型(前/后)		PU	PU
	Wheel quantity Driving wheel/Balance wheel/Bearing wheel		1/2/4	1/2/4
	Standard lift height 标准门架起升高度	mm	3000	2000
	Lowered fork height 货叉最低高度	mm	86	86
	WhFork size(Length/width/thickness) 标准货叉规格(长/宽/高)	mm	1150(1200)/185/55	1150
	Overall length 整车全长 踏板收起/放下	mm	2050/2470	2050/2470
	Overall width 车体宽度	mm	856	856
	Outside width between forks 货叉外侧间隙	mm	550/600/650/685	550/600/650/685
	Inside width between forks 货叉内侧间隙	mm	180/230/280/315	180/230/280/315
	Min.Turning radius 最小转弯半径 踏板收起/放下	mm	1580/1990	1580/1990
Performance	Min.Aisle width for pallets 800 x 1200 最小直角堆垛通道宽度	mm	2180/2580	2180/2580
	Min.Aisle width for pallets 1000 x 1200 最小直角堆垛通道宽度	mm	2210/2600	2210/2600
	Min.ground clearance 最小离地间隙	mm	30	30
	Travel speed,laden/unladen 最大行驶速度 满载/空载	km/h	5/5	4/4.5
	Lift speed,laden/unladen 最大起升速度 满载/空载	mm/s	130/230	90/170
Electrical configuration	Travel speed,laden/unladen 最大下降速度 满载/空载	mm/s	130/230	80/170
	Gradeability,laden/unladen 爬坡速度 满载/空载	%	5/7	5/7
	Drive motor/Lift motor/Steering motor 电动机/起升电机/转向电机 驱	KW	AC1.5/DC3/DC0.15	AC1.5/DC3/DC0.15
Weight	Battery voltage 蓄电池电压	V	24	24
	Battery voltage/capacity 蓄电池电压/容量	Ah	280	280
	Brake 制动		Electromagnetic/Regenerative	Electromagnetic/Regenerative
	Controller 控制器型号		CURTIS	CURTIS
Weight	Battery weight 蓄电池重量	kg	235	235
	Service weight with battery 自重(包含蓄电池)	kg	1240	1240


DIMENSION DRAWING

外形尺寸图

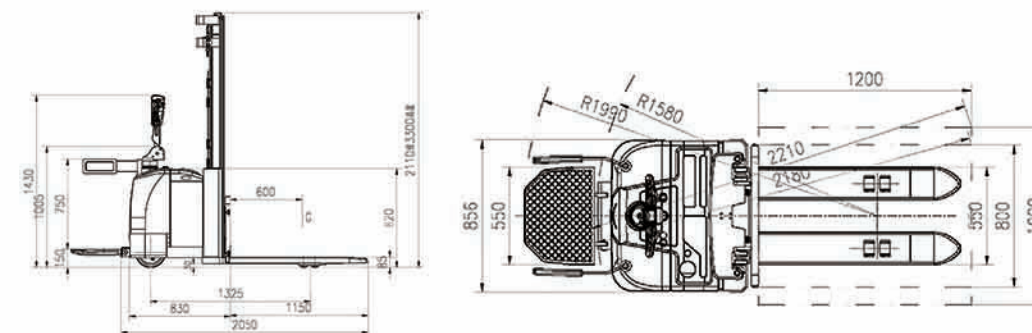

LOAD CURVE

载荷曲线图

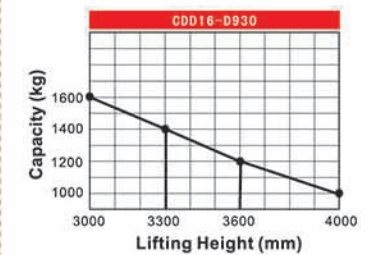

FOLANGSI MACHINE CO., LTD.

Tel.:020-39993595 Fax:020-39993597

E-mail:admin@folangsiforklift.com

